

PARTNER NOT JUST SUPPLIER.


More success with M&S products:

Tank protection virtually pocket-free with M&S safety valves

Remaining dead spots at the entry of the safety valves are determined by the type of connection.

Connections as flanges, welding unions and clamp couplings produce a dome between valve disc and product chamber. This dead spot can usually not be cleaned with standard spraying units.

M&S Armaturen has compensated this disadvantage with a virtually pocket-free tank flange which is welded directly into the tank wall. Thereby an additional and normally necessary cleaning unit is no longer needed. The application of this special construction type is far more hygienic as a safety valve with inlet unions.

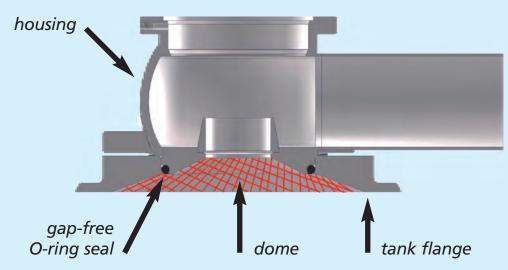

M&S Armaturen GmbH

Industriestraße 24 - 26 · 26446 Friedeburg · Germany fon +49 4465 8070 · fax +49 4465 80740 mail: info@ms-armaturen.de · www.ms-armaturen.de



